

2325D/2325E Jetting & Lubrication Pump



Part No. FA45103F (2325D), FA45914F (2325E)

- **Designed For GBM Jetting & Lubrication Operation** •
- **Independent Pumps For Jetting & Lubrication System** •
- **Adjustable Pump Pressure & Flow** •



Model 2325D Shown

FEATURES

- Independent flow control.
- Bulkhead connections for pressure and return lines.
- In tank agitator keeps mixture from settling in lubrication tank.
- Open/close valve at tank outlet.
- In-line suction strainer to jetting pump.
- The 2325E is designed to be used with a 480 V power supply.

SPECIFICATIONS

Dimensions:

Height	64 in. (1,625 mm)
Width	86.75 in. (2,205 mm)
Length	93 in. (2,360 mm)
Weight (empty tanks)...	3,150 lbs. (1,429 kg)
(full tanks)...	8,300 lbs. (3,765 kg)

Power Unit:

Diesel Engine @ 3,000 rpm ..	30 HP (22.5 kW)
Electric Motor @ 1,750 rpm .	30 HP (22.5 kW)

Drive System: Belt Direct Driven from Engine to Jetting Pump

Fluid Capacities

Fuel Tank	18 gal. (68 L)
Jetting Tank	325 gal (1,230 L)
Lubrication Tank	325 gal (1,230 L)
Hydraulic Tank	25 gal (94.6 L)

Pump Units


Jetting Pump (Two):	Piston pump
Pump Flow	
Pump 1	8 gpm (0 - 30 L/min)
Pump 1 & 2	16 gpm (0 - 60 L/min)
Speed	1,725 rpm
Max. Pressure Rating ..	2,500 psi (17,237 kPa)
Lubrication Pump With Agitator:	
.....	Progressive cavity pump
Pump Flow	4 gpm (15 L/min)
Speed	550 rpm
Max. Pressure Rating...	150 psi (1,034 kPa)
Agitator (bidirectional)	1050 rpm



30 HP @ 1,750 rpm Electrical Motor (2325E)



30 HP @ 3,000 rpm Diesel Engine (2325D)

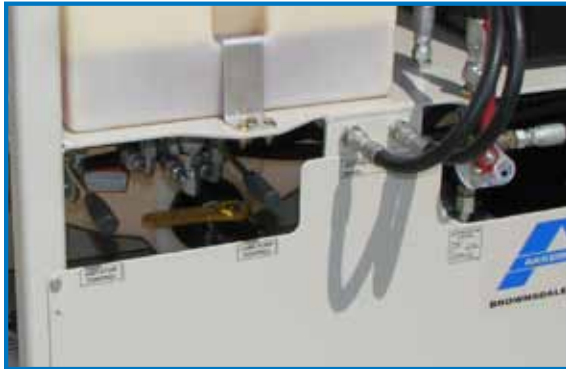

Agitator, Lube Pump and
Jetting Volume Controls



Electrical Controls (2325E)



Fuel 18 gal (68 L) and
Hydraulic 25 gal (94.6 L) Tanks



Jetting Piston Pump (2)
8 or 16 gpm @ 2,500 psi Maximum



Open/Close valve at tank outlet.



Separate 325 gallon (1,230 L) tanks for
lubricant and jetting. Large opening
for ease of filling.