


GRS-25 Pilot Guide Rod Swivel



Part No. FA41275F

- **Tool Designed For Cutter Head Assembly & Auger Boring Machine** •
- **Recommended For 24" OD Pipe & Smaller** •
- **25 Ton Maximum Thrust Capacity** •

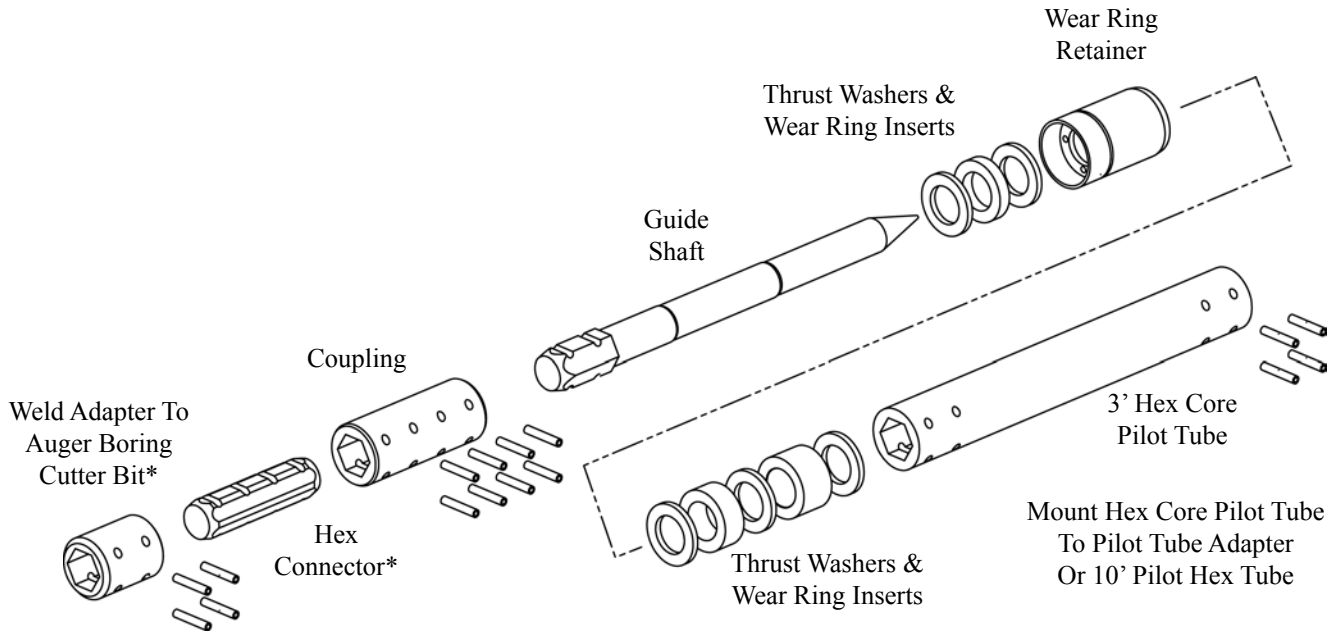

FEATURES

- The pilot guide rod swivel is the tool between the pilot tube adapter and the Akkerman cutter head assembly or an auger boring machine to keep the pilot tubes stationary while allowing the rotation of the augers to remove spoils from the pipeline.
- Designed for stiff or difficult ground soil conditions with no rock in shorter drive lengths up to 24" OD.
- Auger can be removed to inspect face for obstruction or repair of cutter bit.
- Structure is designed to withstand jacking forces applied by auger boring machine.

SPECIFICATIONS

Assembly Length 57 in. (1,448 mm)
Assembly OD 5 in. (127 mm)
Swivel Weight (approx.) 265 lbs. (120 kg)

* Items sold separately. Not included with FA41275F swivel.

Akkerman Inc. reserves the right to improve its products without notice or obligation.