

Jetting & Lubrication Pump



Part No. FA44300F

- Designed For GBM Jetting & Lubrication Operation •
- Independent Pumps For Jetting & Lubrication System •
- Adjustable Pump Pressure & Flow •



FEATURES

- Independent flow control.
- Bulkhead connections for pressure and return lines.
- In tank agitator keeps mixture from settling in lubrication tank.
- Open/close valve at tank outlet.
- In-line suction filter to jetting pump.

SPECIFICATIONS

Dimensions:

Height 42 in. (1,067 mm)
Width 100 in. (2,540 mm)
Length 100 in. (2,540 mm)
Weight (empty) 3,850 lbs. (1,746 kg)

Power Unit:

Diesel Engine @ 3,000 rpm ... 30 HP (7 kW)

Drive System: Hydrostatic variable pump to control jetting and lubrication flow, and agitator RPM

Fluid Capacities

Fuel Tank 30 gal. (114 L)
Jetting Tank 325 gal (1,230 L)
Lubrication Tank 325 gal (1,230 L)


Pump Units

Jetting Pump:


..... Piston pump
Pump Flow 0 - 10 gpm (0 - 38 L/min)
Variable Speed 0 - 1000 rpm
Max. Pressure Rating .. 2,500 psi (17,237 kPa)

Lubrication Pump With Agitator:


..... Progressive cavity pump
Pump Flow 0 - 4 gpm (0 - 15 L/min)
Variable Speed 0 - 300 rpm
Max. Pressure Rating.. 275 psi (1,896 kPa)

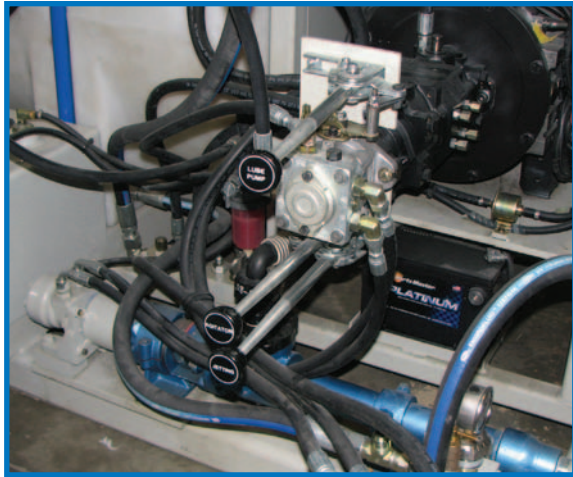


Lubrication Pump, Jetting Pump and Agitator Controls

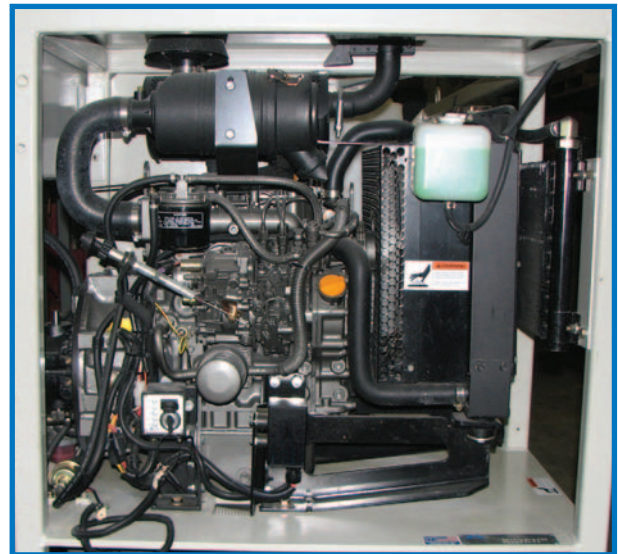

30 HP @ 3,000 rpm Engine

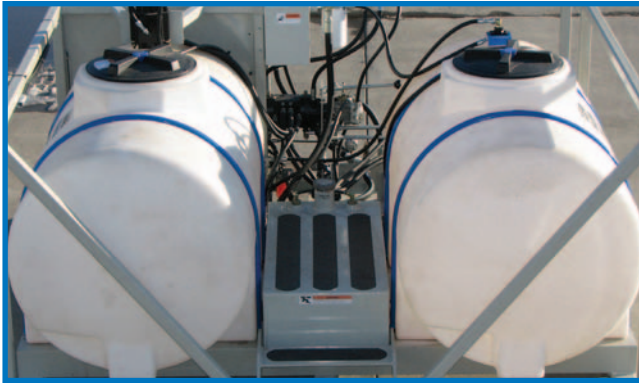


Fuel tank & platform for filling lubrication and jetting tanks.

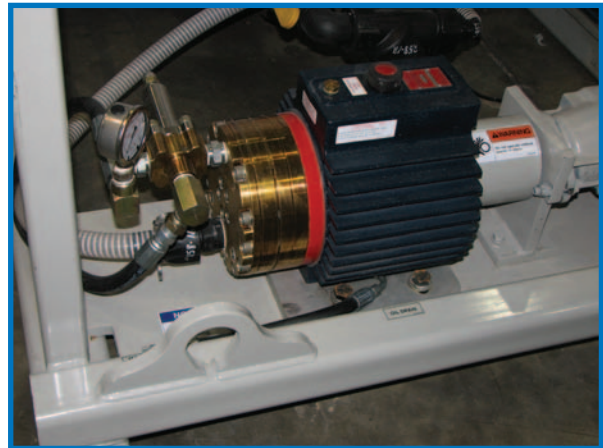

Jetting Piston Pump
0 - 10 gpm @ 0 - 2,500 psi



Separate 325 gallon (1,230 L) tanks for lubricant and jetting. Large opening for ease of filling.

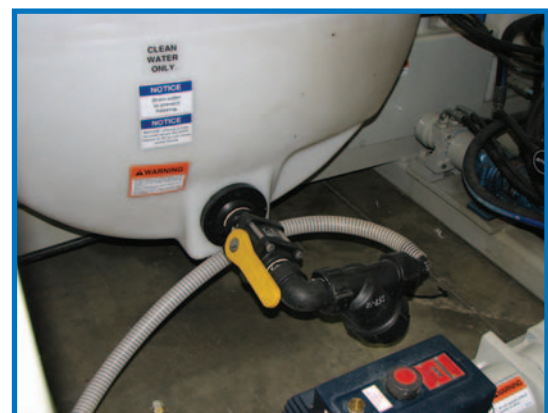

Open/Close valve at tank outlet.